

## 5848q Series Zero Clients

Performance Class

Model Numbers: 5848qv, 5848qc, 5848qr, 5848qp

### Industry Leading VDI Performance

The 10ZiG 5848q NOS™ Series Zero Client is where power, performance and reliability combine to offer the most versatile Zero Client on the market. Powered by an Intel 2.0 GHz Quad Core Processor and capable of speeds of up to 2.42 GHz with Burst Frequency, the 5848q is aimed at Knowledge Workers and Power Users who require Full HD, Multimedia, 3D and CAD performance.

The 10ZiG 5848q NOS™ Series Zero Client is available as a Citrix, VMware, Parallels RAS or RDP Zero Client and has the ability to transform between all solutions with a simple firmware upgrade. The 5848q NOS™ Series Zero Client is VMware PCoIP and Blast Extreme Ready and Citrix HDX, HDX Premium, and HDX 3D Pro Verified.




- ▶ Intel Quad Core 2.0-2.42 (Burst) GHz
- ▶ Choice of dual DisplayPort or dual DVI
- ▶ 7 x USB Ports (2 x USB 3.0)
- ▶ Optional Wireless
- ▶ Optional VESA Mounting
- ▶ 802.1x Network Authentication
- ▶ FREE Centralized Management via 10ZiG Manager



# 5848q Series Thin Clients



System	
Management	10ZiG Manager
Form Factor	Mini
Processor	Intel Quad Core 2.0-2.42 (Burst) GHz
Processor Graphics	Intel HD Graphics
Dimensions	
Device	5.6"(D) x 1.7"(W) x 7.1"(H) - 142mm x 43mm x 196mm
Weight	2.53 lbs (1.15kg)
Connections	
Ports	5 x USB 2.0, 2 x USB 3.0, 1 x Mic In, 1 x Line Out, RJ-45 LAN, 1 x DC Jack
Video/Resolution	2560 x 1600, DisplayPort x 2 (or DVI option @ 1920 x 1080)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac Internal Antenna)
Ethernet	10/100/1000 Base-T
Environmental	
Operating Temp.	32°-95°F (0°-35°C), 20-80% non-condensing humidity
Power	5.8 - 6.2 Watt Consumption, DC-12V/3A External Power Adapter

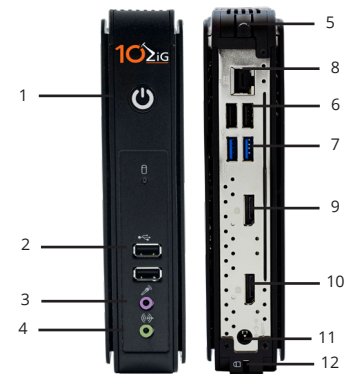

### SPECIFICATIONS

- |                                   |                                    |
|-----------------------------------|------------------------------------|
| 1. Power Button/<br>Power HDD LED | 8. RJ45 LAN<br>Port                |
| 2. USB 2.0 (2)                    | 9. DP Port - 1 (or<br>DVI option)  |
| 3. Mic In                         | 10. DP Port - 2<br>(or DVI option) |
| 4. Line Out                       | 11. DC Jack                        |
| 5. Secure USB<br>2.0 (1)          | 12. Kensington<br>Lock             |
| 6. USB 2.0 (2)                    |                                    |
| 7. USB 3.0 (2)                    |                                    |

	<u>VMware</u>	<u>Citrix</u>	<u>RDP</u>	<u>Parallels RAS</u>
	<b>5848qv</b>	<b>5848qc</b>	<b>5848qr</b>	<b>5848qp</b>
Operating System	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)
Memory (RAM)	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB
VDI Broker Support	VMware Horizon (Blast Extreme, PCoIP, RDP)	Citrix XenApp & XenDesktop (HDX, HDX Premium, HDX 3D Pro)	RDP	Parallels RAS



Americas P: +1 (866) 865-5250  
 EMEA P: +44 (0) 116 214 8650  
 APAC P: +61 2 80027421  
 DE P: +49(0) 6724 934-45

E: info@10ZiG.com  
 E: info@10ZiG.eu  
 E: info@10ZiG.com.au  
 E: vertrieb@10zig.de

W: www.10ZiG.com

